

# GUIDE TO USING OUR PA SYSTEMS MACKIE 408M & 408S



SET THE MASTER VOLUME TO 0 & TURN THE DESK ON (CHECK THE POWER LIGHT)



PLUG IN A MIC




SET THE MIC GAIN TO 12 O'CLOCK



SET THE EQ CONTROLS TO 'U'



SET THE MONITOR SEND TO 0, AND THE FX SEND TO 'U'

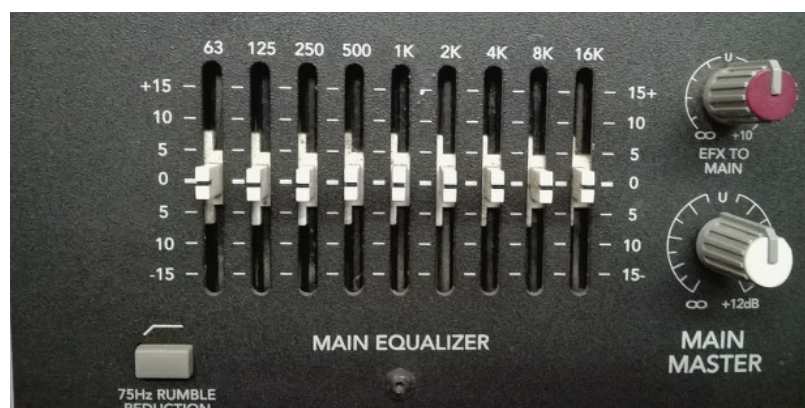

SET ALL THE MAIN EQUALIZER BANDS TO '0', AND THE EFX TO MAIN TO 'U'.

DISABLE '75HZ RUMBLE REDUCTION'.

TALK INTO THE MIC AND SLOWLY BRING UP THE MAIN MASTER VOLUME



SELECT 'MD. PLATE', SET ALL PARAMETERS TO 'NORMAL', AND DISABLE 'EFX BYPASS' & 'EFX WIDE'



IF YOU CAN'T HEAR THE REVERB, INCREASE THE 'EFX TO MAIN' LEVEL